SCHULTHESS
Professional

Dryer – Professional

proLine D200 / D325 / D325G

A strong team: The proLine dryer The Game Changer completes the professional laundry process. Its running time and programmes are perfectly coordinated with the proLine washing machines. The radial-axial airflow and the precise moisture measurement of the smartDry function ensure rapid drying.

Models

proLine
D200 / D325 / D325G
Stone

proLine
D200 / D325 / D325G
Chromstahl

available from the end of August 2026

proLine
D200 / D325 / D325G
Carbon

Features

- Industrial dryer for gentle fabric care
- Intuitive operation with 4.3» colour display
- «Expert» control with 18 standard programmes
- Robust construction for a long durability (Swiss made and designed for over 30,000 operating hours)
- High efficiency through axial-radial air flow and optimised waste heat recovery
- Stainless steel drum for efficient drying processes
- Maintenance-free direct drive and drum reversing
- Language selection button for 26 different languages
- Quiet: ‹70 db (A)
- Pull-out fluff filter drawer (easy to use)
- Can be driven under with pallet trolleys for simple and efficient delivery and assembly
- Door hinge left (can be changed to right on site)

Options

- «Expert+» control with 18 standard and 53 professional programmes
- WLAN interface for programme and software updates
- Standard machine plinth (270 mm)
- Special machine plinth (380 mm)
- Connection for external fresh air (160 mm and 200 mm)
- Exhaust air connection reduced (160 mm)
- Potential-free contact for external ventilation control
- Mains blocking set (load shedding/current peak)

Caution: Colour tone may vary due to lighting conditions, screen or print quality.
View the product in a showroom or order material samples from your advisor.

SWISS MADE

Technical data Dryer proLine

Brand names		**Schulthess**	**Schulthess**	**Schulthess**
Model name		**proLine D200**	**proLine D325**	**proLine D325G**
Product number		4253.2	4255.2	4258.1
Features				
Heating		Electric	Electric	Gas
Load (1:18)	kg	11	18	18
Load (1:20)	kg	10	16	16
Height	mm	1350	1350	1350
Height with plinth	mm	1620	1620	1620
Width	mm	790	790	790
Depth with closed door	mm	900	1200	1200
Net weight	kg	196	233	233
Drum capacity	l	200	325	325
Door opening diameter	mm	580	580	580
Drum diameter	mm	728	728	728
Drum depth	mm	480	780	780
Supply voltage	V	400	400	230
Mains frequency 50 Hz		•	•	•
Mains frequency 60 Hz				
Connected load	kW	15	21.2	0.9
Heat output	kW	14.4	20.6	21
Drive power	kW	0.6	0.6	0.6
Fuse rating	A	25	32	10
Cable resistance on site max.	Pa	200	200	200
Airflow	m^3/h	480	840	840
Evaporation rate	l/min	0.17	0.25	0.25
Drying rate	kg/h	20	32	32
Energy consumption	kWh/kg	0.57	0.56	0.61
Number of languages		26	26	26
Country of manufacture		CH	CH	CH
Equipment				
Recessed lint filter drawer		W	W	W
Recessed lint filter drawer lockable		W	W	W
Exhaust connection Ø200 mm		W	W	•
Exhaust connection Ø160 mm		W	W	
Mains suppression set		O	O	
Ventilation contact set		O	O	
Central fresh air connection Ø200 mm		O	O	
Central fresh air connection Ø160 mm		O	O	
prePaid mit RFID		O	O	
Connectivity with RFID and Ethernet		O	O	O
Connectivity		O	O	O
Machine base		O	O	O
Additional appliance data				
Name and address of provider		Schulthess Maschinen AG, CH-6330 Cham ZG	Schulthess Maschinen AG, CH-6330 Cham ZG	Schulthess Maschinen AG, CH-6330 Cham ZG

Explanations • = permanently integrated O = optional W = selectable

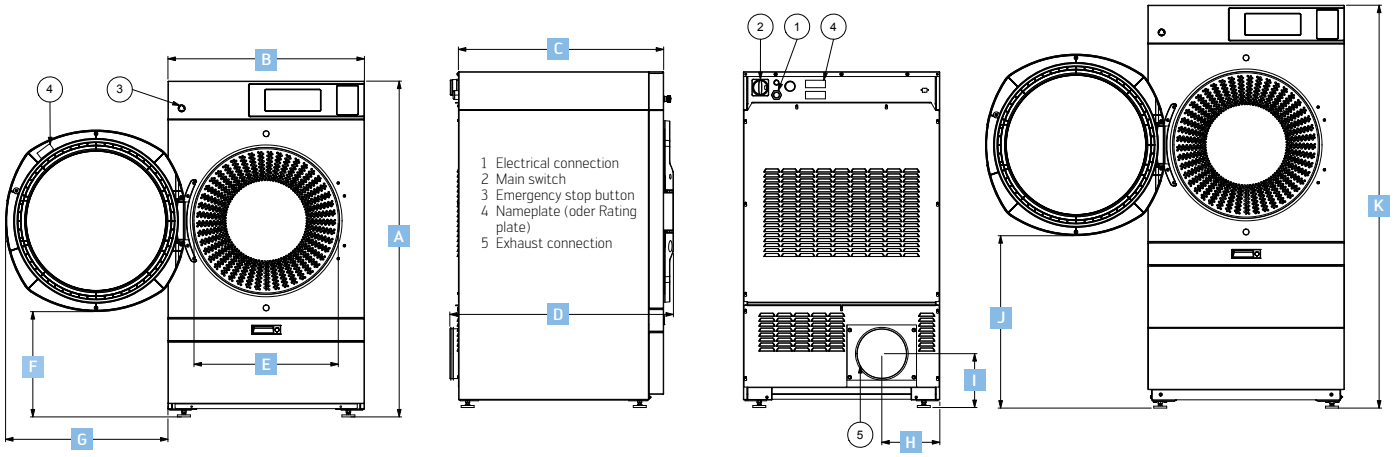

	A	B	C	D	E	F	G	H	I	J	K
D200	1350	790	825	900	580	425	655	235	220	695	1620
D325	1350	790	1125	1200	580	425	655	235	220	695	1620

 All rights reserved

SCHULTHESS